



SOLAHART SUNCELL RESIDENTIAL SOLAR PANEL

SOLAHART375V1

The new high-performance Solahart SunCell panel is not only great value but is also custom designed and built to Solahart's strict specifications.

Solahart SunCell ticks all the boxes on durability and has passed endurance testing for up to three times more cycles than the international standard, which makes it an ideal solution in Australia's harsh conditions.

Reliable silicone connections also ensure excellent stability and durability. Other features include genuine Stäubli MC4 EVO2 connectors to secure a reliable connection and a sealed junction box that offers corrosion protection and water resistance.

The 12-Year Solahart Product Warranty provides ultimate confidence and peace of mind.

State-of-the-art half-cell technology:

For excellent performance under real conditions.

High efficiency:


Optimal yields, more power generated per square metre.

Low electricity generation costs:

High energy produced per panel means you pay less for electricity generated.

Efficient, and durable:

Manufactured to specification and only available through Solahart.

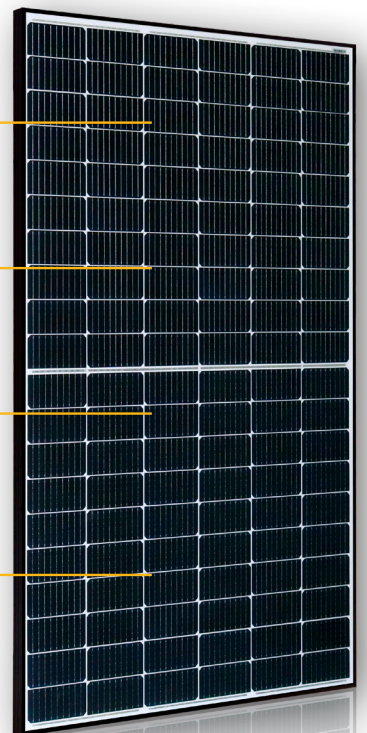

HOW YOU BENEFIT



HIGH SOLAR YIELD

Innovative half-cell technology with excellent power efficiency that results in more energy production per square metre.



DURABILITY

Extensive durability testing for up to 3 times the international testing standard.



VALUE FOR MONEY

Cost-effective panel solution for a high return on your investment.



TRUSTED WARRANTIES

12-Year Solahart Product Warranty for peace of mind, plus, 25-Year Manufacturer's Performance Guarantee.*

Technical Data

MODEL SOLAHART375V1

Electrical Data

Minimum performance at standard test conditions, STC⁽¹⁾ (Power Tolerance +5 W / -0 W)

| | |
|--|--------------------|
| Power at MPP ⁽²⁾ - P _{MPP} | 375 W _p |
| Short circuit current ⁽²⁾ - I _{sc} | 11.42 A |
| Open circuit voltage ⁽²⁾ - V _{oc} | 41.05 V |
| Current at MPP [#] - I _{MPP} | 10.94 A |
| Voltage at MPP [#] - V _{MPP} | 34.28 V |
| Efficiency ⁽¹⁾ - η | 20.3% |

Minimum performance at normal operating conditions, NMOT⁽³⁾

| | |
|--|----------------------|
| Power at MPP - P _{MPP} | 279.6 W _p |
| Short circuit current [#] - I _{sc} | 9.19 A |
| Open circuit voltage [#] - V _{oc} | 38.59 V |
| Current at MPP [#] - I _{MPP} | 8.75 A |
| Voltage at MPP [#] - V _{MPP} | 31.96 V |

⁽¹⁾1000 W/m², 25±2°C, AM 1.5 G. ⁽²⁾Measurement tolerances P_{MPP} ±3%; I_{sc}, V_{oc} ±5% at STC. ⁽³⁾800 W/m², NMOT, spectrum AM 1.5 G. * Typical values, actual values may differ.


Other information

| | |
|---------------------------------------|---------------|
| Part Number | SOLAHART375V1 |
| Solahart Product Warranty* | 12 years |
| Manufacturer's Performance Guarantee* | 25 years |
| Country of Manufacture | China |

Mechanical Data

| | |
|------------------------|---|
| Dimensions (H x W x D) | 1755 x 1038 x 35 mm (including frame) |
| Weight | 20.0 Kg |
| Glass thickness | 3.2 mm |
| Backsheet | White |
| Frame colour | Black |
| Cell | 6 x 20 monocrystalline solar half-cells |
| Number of diodes | 3 |
| Junction box | Protection class IP68, with bypass diodes |
| Cable | 4 mm ² solar cable; (+) 1200 mm, (-) 1200 mm |
| Connector | Stäubli MC4 EVO2 connectors (PV-KST4 EVO 2 & PV-KBT4 EVO 2) |

Manufacturer's Performance Guarantee

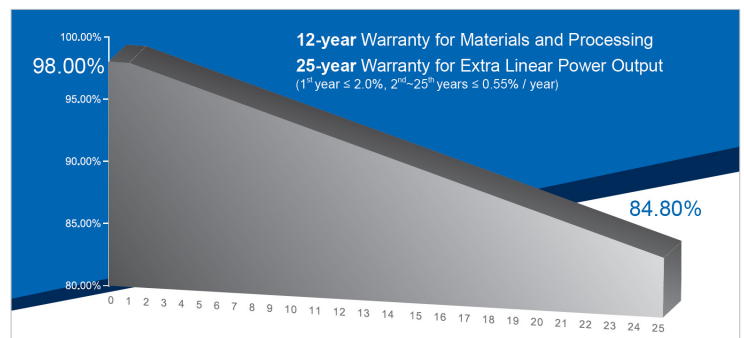

At least 98% of nominal power during the first year.

Thereafter max 0.6% degradation per year.

At least 84.8% of nominal power up to 25 years.

All data within measurement tolerances.

Temperature Coefficients

| | |
|---|------------|
| Normal module operating temperature (NMOT) | 41±2°C |
| Temperature coefficient of P _{MPP} - γ | -0.34%/°C |
| Temperature coefficient of V _{oc} - β | -0.27%/°C |
| Temperature coefficient of I _{sc} - α | +0.035%/°C |


Properties for System Design

| | |
|---|------------------|
| Maximum system voltage - V _{sys} | 1500 V |
| Maximum reverse current - I _r | 20 A |
| Maximum design load, Push / Pull | 3600 / 1600 Pa |
| Maximum test load, Push / Pull | 5400 / 2400 Pa |
| Fire rating based on IEC / UL | Class C / TYPE 4 |

Qualifications and Certificates

IEC 61215: 2016; IEC 61730: 2016, Application class II.

Dimensions - Measurements in mm

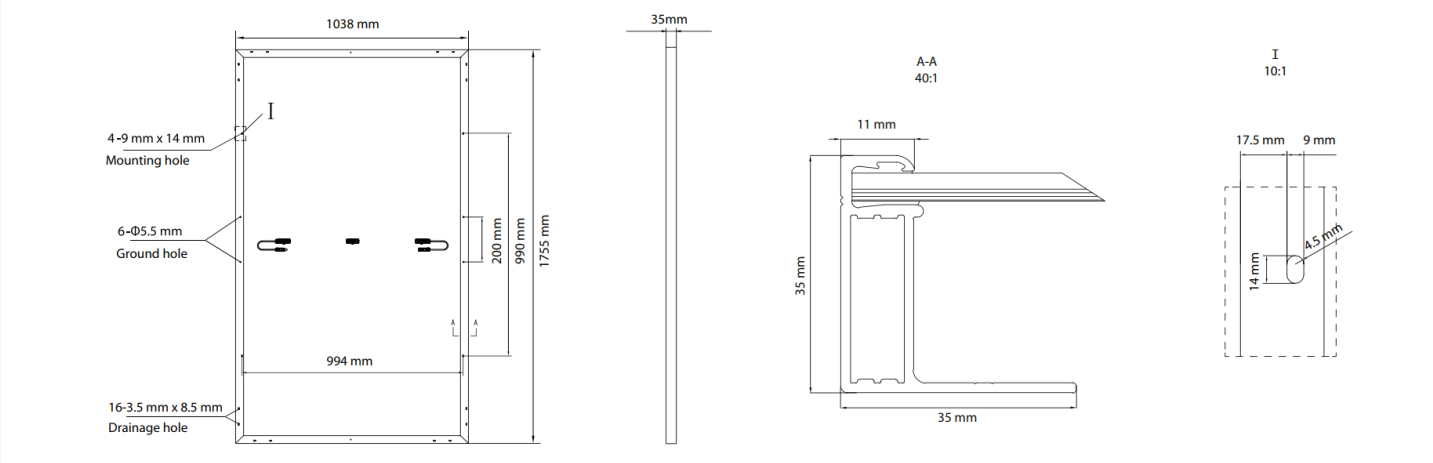

Licence Holder and Importer:

Solahart Industries Pty Ltd., 1 Alan St. Rydalmere, NSW 2116, Australia.

*For full details see Solahart Owner's Guide & Installation Instructions.

Specifications and designs included in this data sheet are subject to change without notice.

Solahart Australia 1300 769 475 | www.solahart.com.au

Reorder code: SHDS/PV_SH375_SUNC IH0113_Solahart SunCell Solar Panel_375W_June 2021