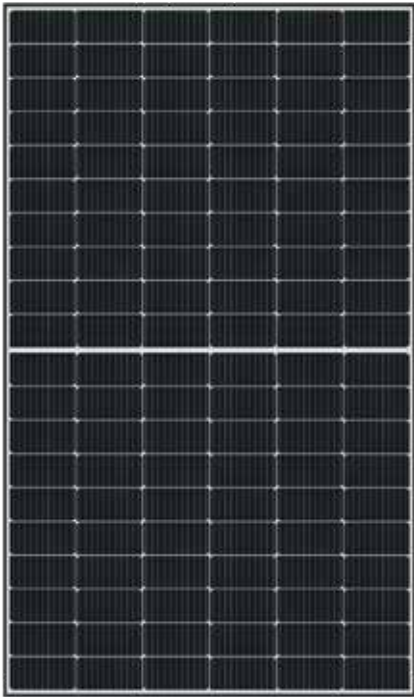


SOLAHART SUNCELL® PLUS N-TYPE COMMERCIAL SOLAR PANELS

SOLAHART480DH2



The new high-performance n-type dual-glass Solahart SunCell® Plus panel is not only great value but it's also custom-designed and built to Solahart's strict quality specifications. Offering positive tolerance of up to 3% ensures that each SunCell-Plus panel will have a rated maximum power on or above 480W at Standard Test Conditions (STC)⁽¹⁾.

With a high-efficiency rating of 22.2%, proven durability, an attractive black frame and an easy-to-install design, Solahart SunCell® Plus is the ideal solution for both commercial and residential applications.

SunCell Plus comes with industry leading 30 Year Product Warranty and 30 Year Performance Guarantee. Performance Guarantee assures at least 89.4% of nominal power at 25 years and 87.4% at 30 years. Every Solahart system is backed by a trusted Solahart Australia Warranty that offers the advantage of local on-the-ground support to deliver true peace of mind. With more than 70 years of solar experience and over 60 Dealerships across Australia, we're here for the long haul.

How you benefit:



RELIABLE DESIGN

Dual-glass n-type technology and quality construction for excellent performance in Australian conditions.



SAFE AND DURABLE

Dual-glass design enhances fire rating and is more resilient to micro-cracks for high durability.



HIGH PERFORMANCE

High energy produced per panel means you pay less for electricity generated.



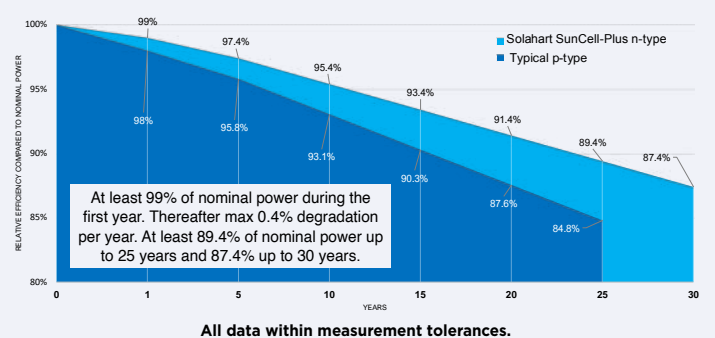
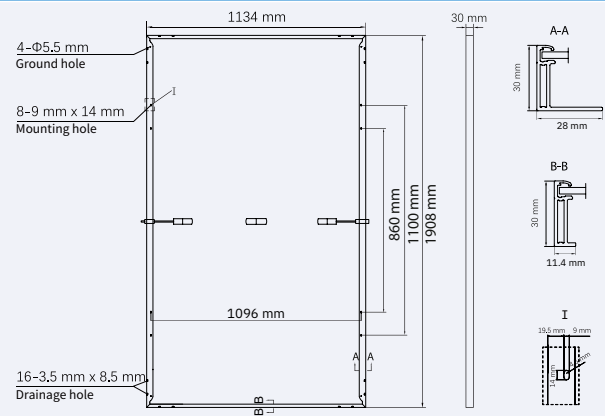
VALUE FOR MONEY

Cost-effective panel solution for a high return on your investment.



SOLAHART WARRANTY

30-Year Solahart Product Warranty for peace of mind, plus, 30-Year Performance Guarantee for long term returns.*

Model		SOLAHART480DH2	
Electrical Data			
Minimum performance at standard test conditions, STC ⁽¹⁾ (Power Sorting 0 - +3%)			
Power at MPP ⁽²⁾ - P _{MPP}		480 Wp	
Short circuit current - I _{sc}		13.91 A	
Open circuit voltage - V _{oc}		43.46 V	
Current at MPP - I _{MPP}		13.14 A	
Voltage at MPP - V _{MPP}		36.52 V	
Efficiency ⁽¹⁾ - η		22.20%	
Minimum performance at normal operating conditions, NMOT ⁽³⁾			
Power at MPP - P _{MPP}		361 Wp	
Short circuit current - I _{sc}		11.23 A	
Open circuit voltage - V _{oc}		41.28 V	
Current at MPP - I _{MPP}		10.50 A	
Voltage at MPP - V _{MPP}		34.37 V	
Other Information			
Part Number		SOLAHART480DH2	
Solahart Product Warranty*		30 years	
Performance Guarantee*		30 years	
Country of Manufacture		China	
Mechanical Data		Performance Guarantee	
Dimensions (H x W x D)	1908 x 1134 x 30 mm (including frame)	 <p>At least 99% of nominal power during the first year. Thereafter max 0.4% degradation per year. At least 89.4% of nominal power up to 25 years and 87.4% up to 30 years.</p> <p>All data within measurement tolerances.</p>	
Weight	23 Kg		
Glass thickness	1.6 mm front and 1.6 mm back		
Backsheet	White		
Frame	Black Anodised Aluminium		
Cell	6 x 20 n-type monocrystalline solar half-cells		
Number of diodes	3		
Junction box	Protection class IP68, with bypass diodes		
Cable	4 mm ² solar cable; (+) 1300 mm, (-) 1300 mm		
Connector	Stäubli MC4 EVO2 connectors (PV-KST4-EVO2A/xy, PV-KBT4-EVO2A/xy)		
Temperature Coefficients		Dimensions - Measurements in mm	
Normal module operating temp (NMOT)	41±2°C		
Temp coefficient of P _{MPP} - γ	-0.29%/°C		
Temp coefficient of V _{oc} - β	-0.25%/°C		
Temp coefficient of I _{sc} - α	+0.043%/°C		
Qualifications and Certificates			
IEC 61215: 2021; IEC 61730: 2016, Application class II.			
Properties for System Design			
Max system voltage - V _{SYS}	1500 V		
Max reverse current - I _R	25 A		
Max design load, Push/Pull	3600 / 1600 Pa		
Max test load, Push/Pull	5400 / 2400 Pa		
Fire rating based on IEC/UL	Class A		

Specifications and designs included in this data sheet are subject to change without notice.

⁽¹⁾1000 W/m², 25±2°C, AM 1.5 G. ⁽²⁾Measurement tolerances P_{MPP} ±3.5%; I_{sc} ±5%; V_{oc} ±3.5% at STC. ⁽³⁾800 W/m², NMOT, spectrum AM 1.5 G. * Typical values, actual values may differ.

*30-year Solahart Product Warranty covers certain defects with the Solahart SunCell® Plus solar panels. Please refer to the 'Solahart PV Systems Owner's Guide' for full details, available on Solahart's website www.solahart.com.au. 30-year Performance Guarantee is provided by the manufacturer of the Solahart SunCell Plus solar panels and guarantees the maximum reduction in power output performance of the panels over a 30-year period. Neither the Solahart Product Warranty nor the Performance Guarantee are intended to exclude, restrict or modify your rights under the Australian Consumer Law.

Solahart Industries Pty Ltd (Solahart) operates a national network of dealers through which independent companies operate dealerships in designated geographic areas. To find your local Solahart Dealer, please visit solahart.com.au. © Solahart (2024). Solahart and the Solahart logo are registered trademarks of Solahart.